


Interactive Brokers

OptionWorkshop Trader Workstation (TWS), IB. , .

 Interactive Brokers


T TWS

1. ;

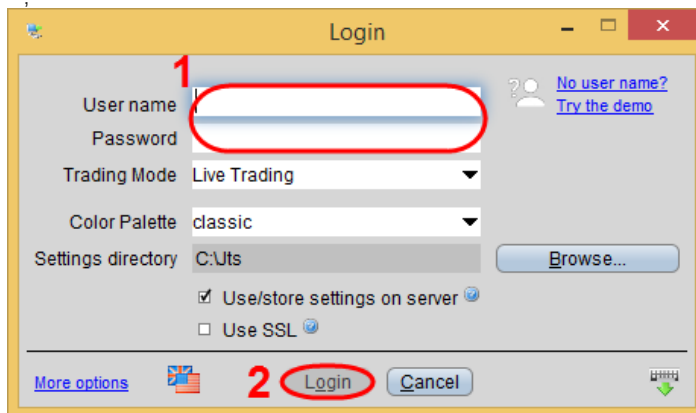


1 -

2. EditGlobal Configuration...

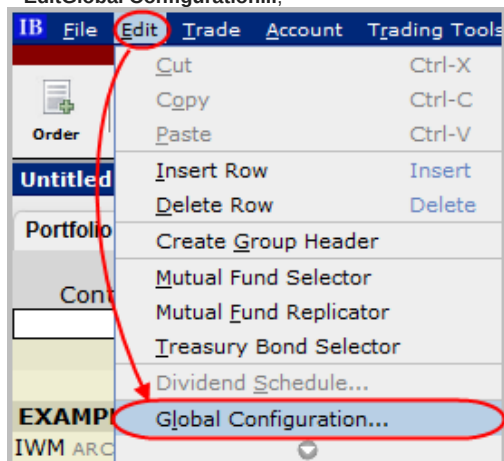

2-


3. **APISettings** (. 3[1]) **Enable ActiveX and Socket Clients** (. 3[2]).

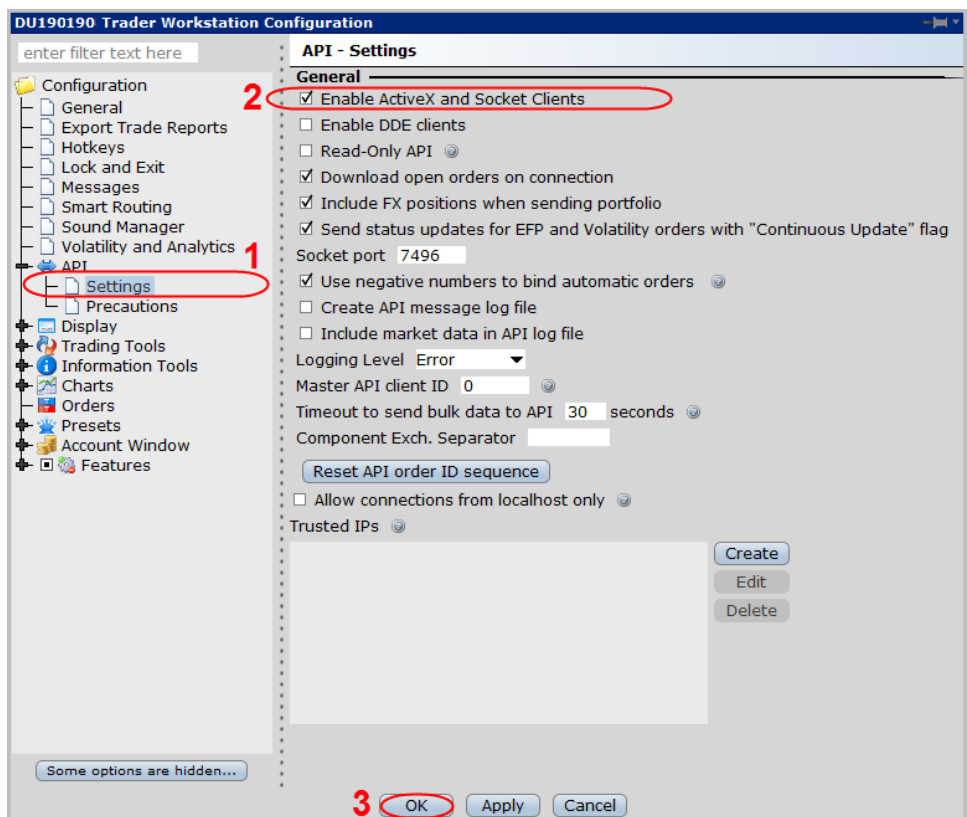

3 –

! Socket port (7496) Master API client ID (0) OW. , .

4. **OK** (. 3[3]);
5. OW  ;
6. **Data source**,  (Add transport) **Interactive Brokers**;

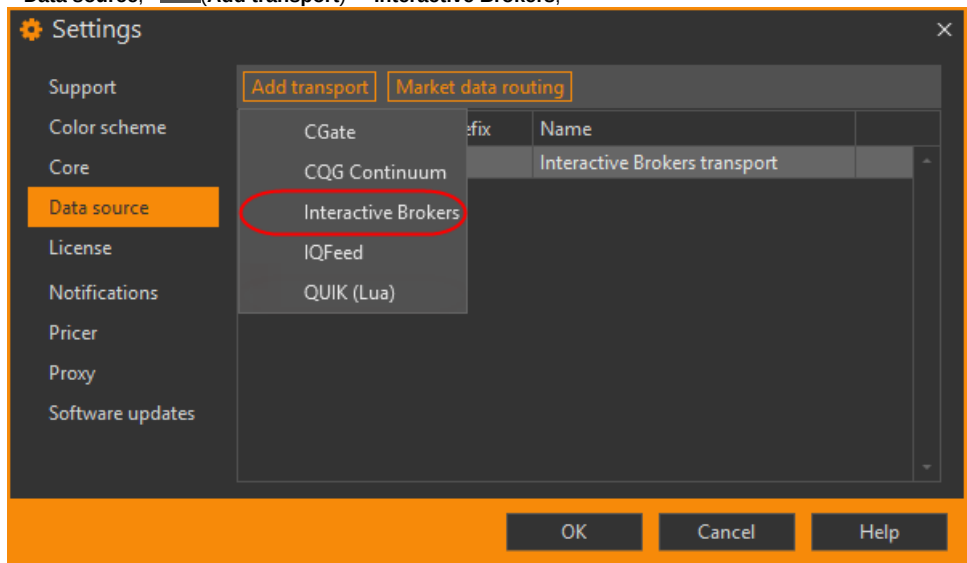

4 – Data source

7. (. 5[1]) **OK** (. 5[2]);

⚙️

Configure data source

✕

Type

Interactive Brokers

Name

Interactive Brokers transport

Prefix

IB

☒ Enable transport

OptionWorkshop will add a "IB_" prefix to every account received from this data source.

Address

127.0.0.1

Use local machine address

Port

7496

Use default TWS port

Use default Gateway port

Client ID

0



2

OK

Cancel


5 –

1 –

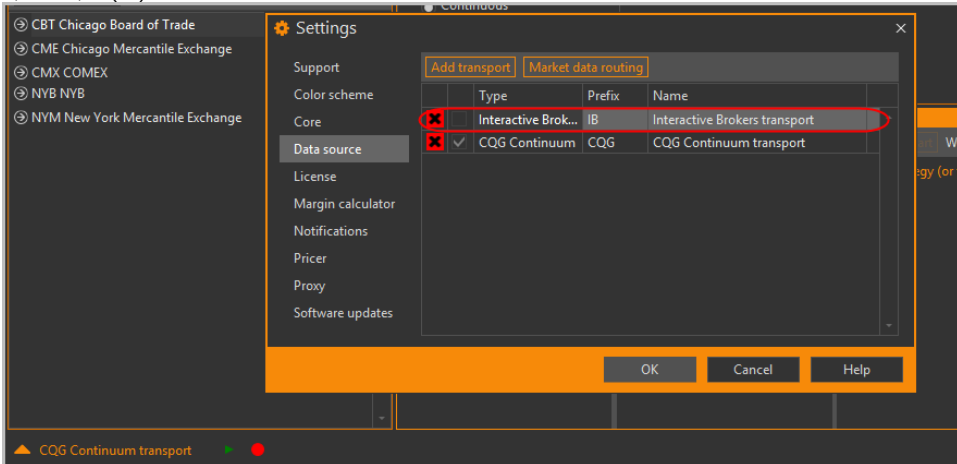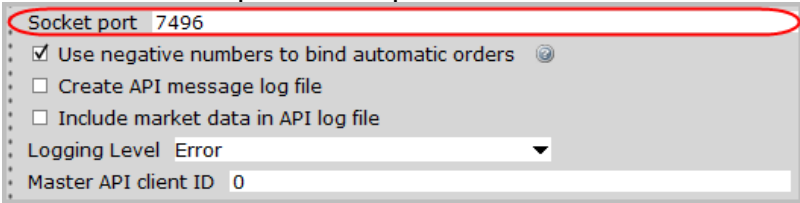Type	
Name	, ().
Prefix	, , IB
Enable transport	, IB , (.) 
Adress	A , Interactive Brokers. OW , localhost 127.0.0.1, Use local machine address;
Port	. Use default TWS port. Socket port 

Client ID	Interactive Brokers. «0».	Master API client
	Socket port 7496 ☒ Use negative numbers to bind automatic orders ☐ Create API message log file ☐ Include market data in API log file Logging Level Error Master API client ID 0	

8. Data source (. 4).

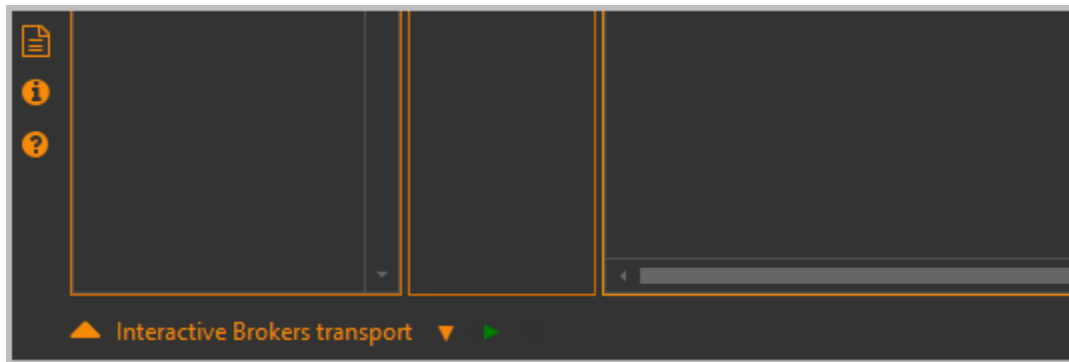

6 –

IB

IB


:

1. IB ;

7 –

2. Configure Settings;

3. API Settings :

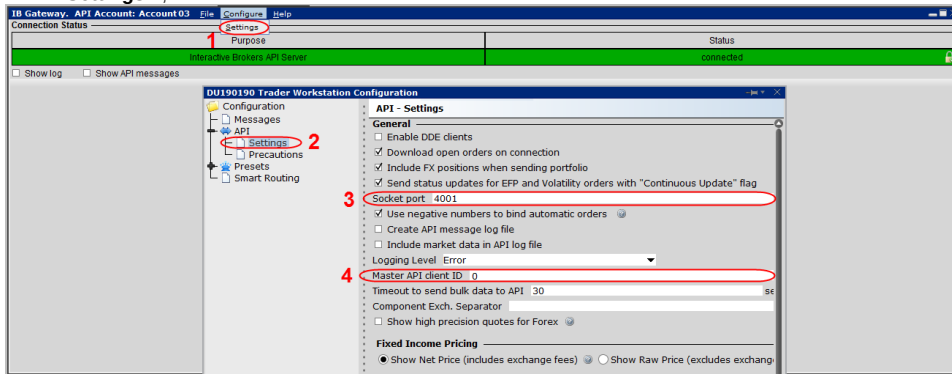


8 –

Socket port (4001) Master API client ID (0) OW. , .

4. OptionWorkshop.


5. OW  ;

6. Data source,  (Add transport) Interactive Brokers;

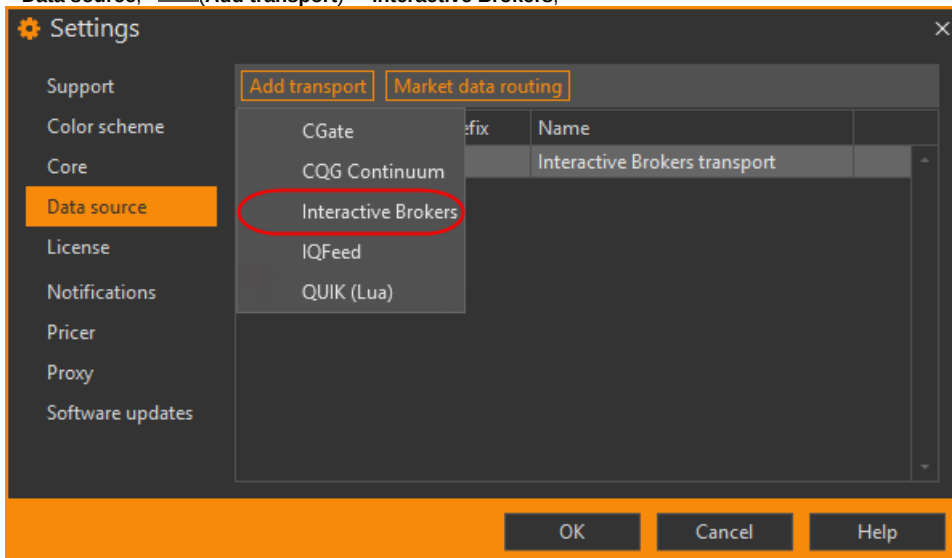


9 – Data source

7. (. 10[1]) OK (. 10[2]);

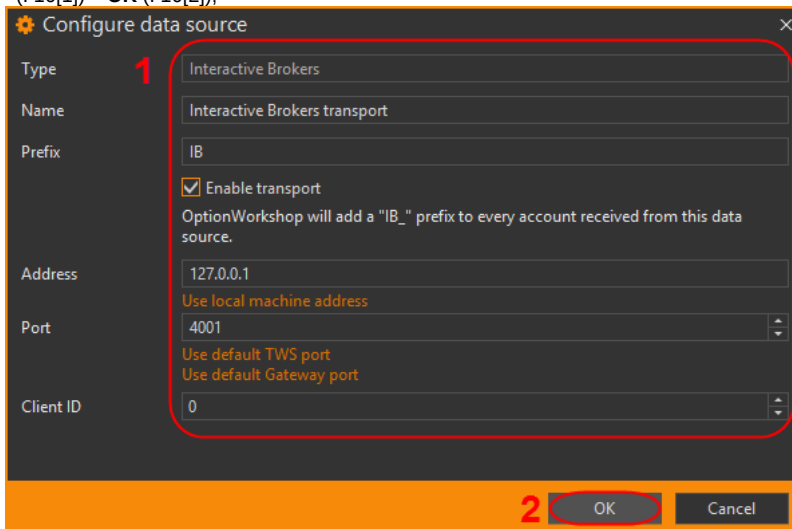

10 –

2 – IB

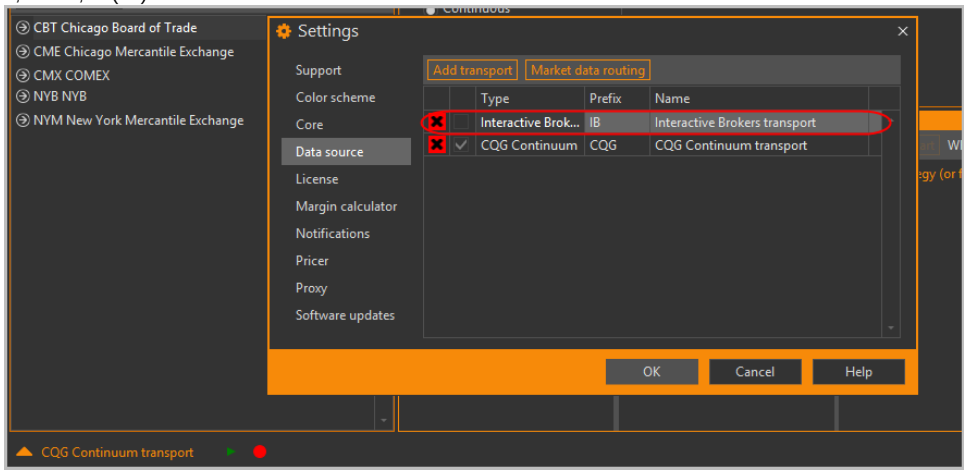Type	
Name	, ().
Prefix	, , IB
Enable transport	, IB , (.) 
Adress	A , Interactive Brokers. OW , localhost 127.0.0.1, Use local machine address;
Port	. Use default Gateway port. Socket port (400) ;
Client ID	, Interactive Brokers. «0». , . Master API client

8. Data source (. 9).

