


CGate

CGate :

- 1. OW  ;
- 2. **Data source**;
- 3.  (Add transport), **CGate**;

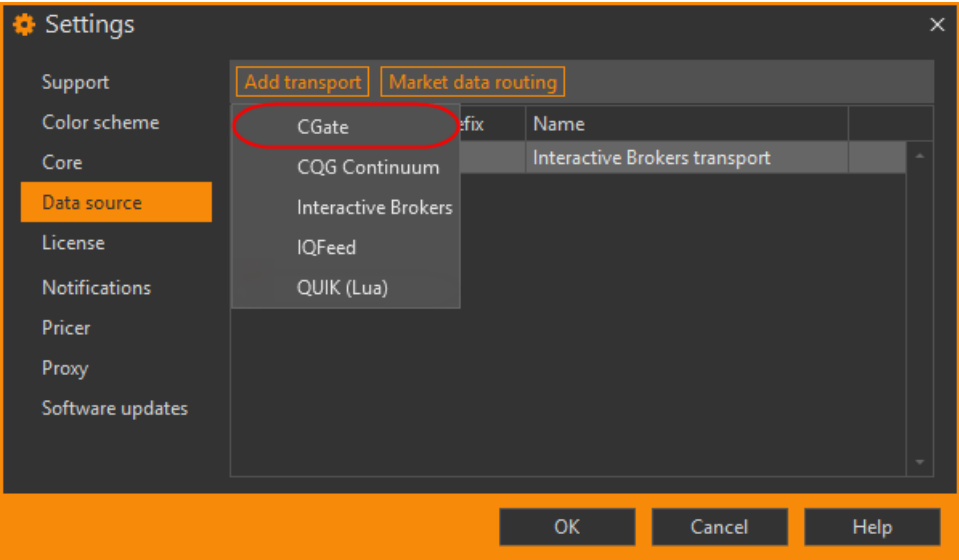

1 – Data source

:

-
-
-
-
-
-

4. (. 2[1]) OK (. 2[2]);

⚙️

Configure data source

✕

Type

CGate

Name

CGate transport

☒ Enable transport

Prefix

CG

OptionWorkshop will add a "CG_" prefix to every account received from this data source.

IP address

127.0.0.1

Use local address

Port

4001

Use default CGate port

Data login

data_login

Data password

...

Transaction login

transaction_login

Transaction password

...

☒ Order books enabled

☐ Test environment

2

OK

Cancel

2 –

1 –

Type													
Name	, (.).												
Prefix	, ,												
Enable transport	, Cgate , (.) Type to search... ⊕ ? Mode ☒ Continuous ⚙️ Settings ✕ Support Color scheme Core Data source License Margin calculator Notifications Pricer Proxy Software updates Add transport Market data routing <table><tr><th></th><th>Type</th><th>Prefix</th><th>Name</th></tr><tr><td>☒</td><td>CQG Continuum</td><td>CQG</td><td>CQG Continuum transport</td></tr><tr><td>☒</td><td>CGate</td><td>CG</td><td>CGate transport</td></tr></table> OK Cancel Help ▲ CQG Continuum transport ▼ ● ●		Type	Prefix	Name	☒	CQG Continuum	CQG	CQG Continuum transport	☒	CGate	CG	CGate transport
	Type	Prefix	Name										
☒	CQG Continuum	CQG	CQG Continuum transport										
☒	CGate	CG	CGate transport										
IP address	IP , CGate. CG OW , localhost 127.0.0.1, Use local address;												
Port	. (4001) Use default CGate port												

Data login	Data (: ,);
Data password	Data (: ,);
Transaction login	Transaction (, ,);
Transaction password	Transaction (, ,);
Order books enabled	/ (). Cgate
Test environment	Test environment.

5. Data source (. . 1).

OptionWorkshop. client_router.ini (CGate) [AS:Local] 2 OW:

- Data login data password;
- Transaction login Transaction password.

:

- [_data]=[];
- [_transaction]=[] .



:
:

:

1. Data: test_data=test;
2. Transaction: test_transaction=test. ;
3. client_router.ini (CGate) [AS:Local] .

```
[AS:Local]
test_data=test;
test_transaction=test;
```

3 -

:

1. 3- Data:
 - a. test1_data=test;
 - b. test2_data=test;
 - c. test3_data=test;
2. Transaction:
 - a. test1_trans=test;
 - b. test2_trans=test;
 - c. test3_trans=test;
3. client_router.ini (CGate) [AS:Local] .

[AS:Local]

test1_data=test;

test1_trans=test;

test2_data=test;

test2_trans=test;

test3_data=test;

test3_trans=test;

1-й экземпляр

2-й экземпляр

3-й экземпляр